





Ameri-Brand Products Inc


Crash Door Install Pics and Text ALCD

Installing the ALCD Combo

The Crash Door is attached to the Airlock as a separate module. Once the Airlock has been assembled, the Crash Door Module can then be attached to it. Use the 3-1/2" Bolts provided to attach them together. The holes are pre-drilled. You may need to use your awl to align the holes & possibly run a 1/4" drill bit through them to make the work easier.

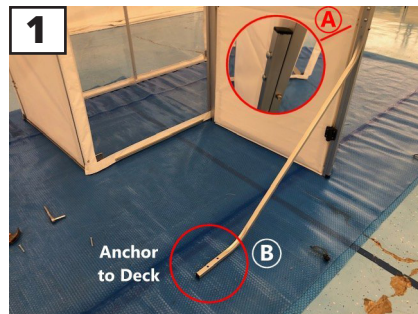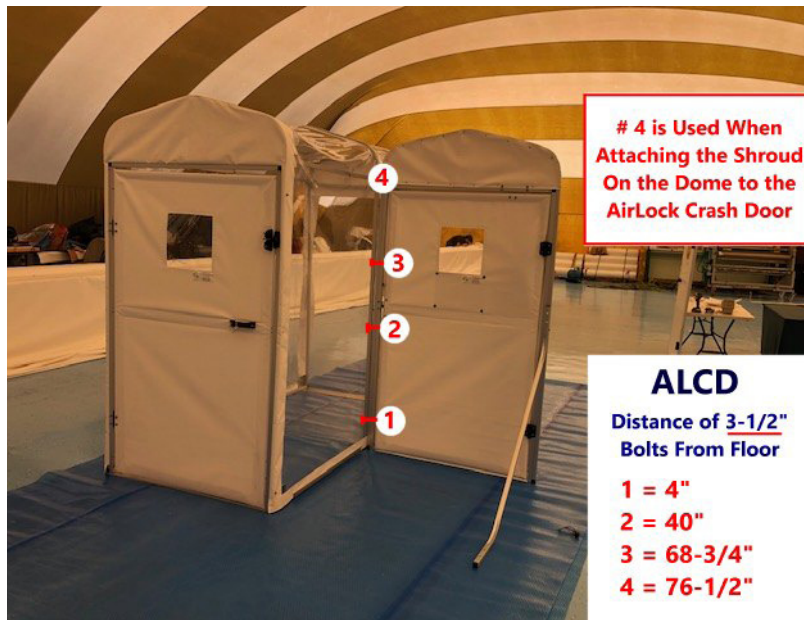

1 The Top of the Support Brace is attached to the Crash Door as shown in picture #1. The Bottom of the Support Brace is anchored into the Pool Deck Using (2) RM-38 "Redhead" style Expansion Anchors, (2) Washers, & (2) 1"x 3/8-16 Hex Bolts. See picture #1, item "B".

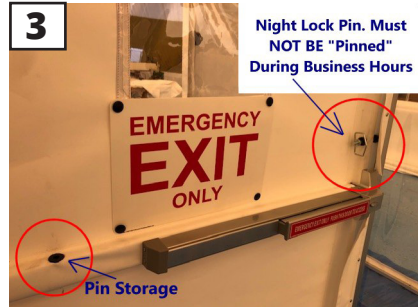


2 The Crash Door swings away from the pool. An automatic door closer is installed to prevent excess air loss if the door is accidentally opened.

3 After Hours "Security Pin".

4 Once completed, the Airlock can be mounted to the deck using the Hardware provided on CARD #2.



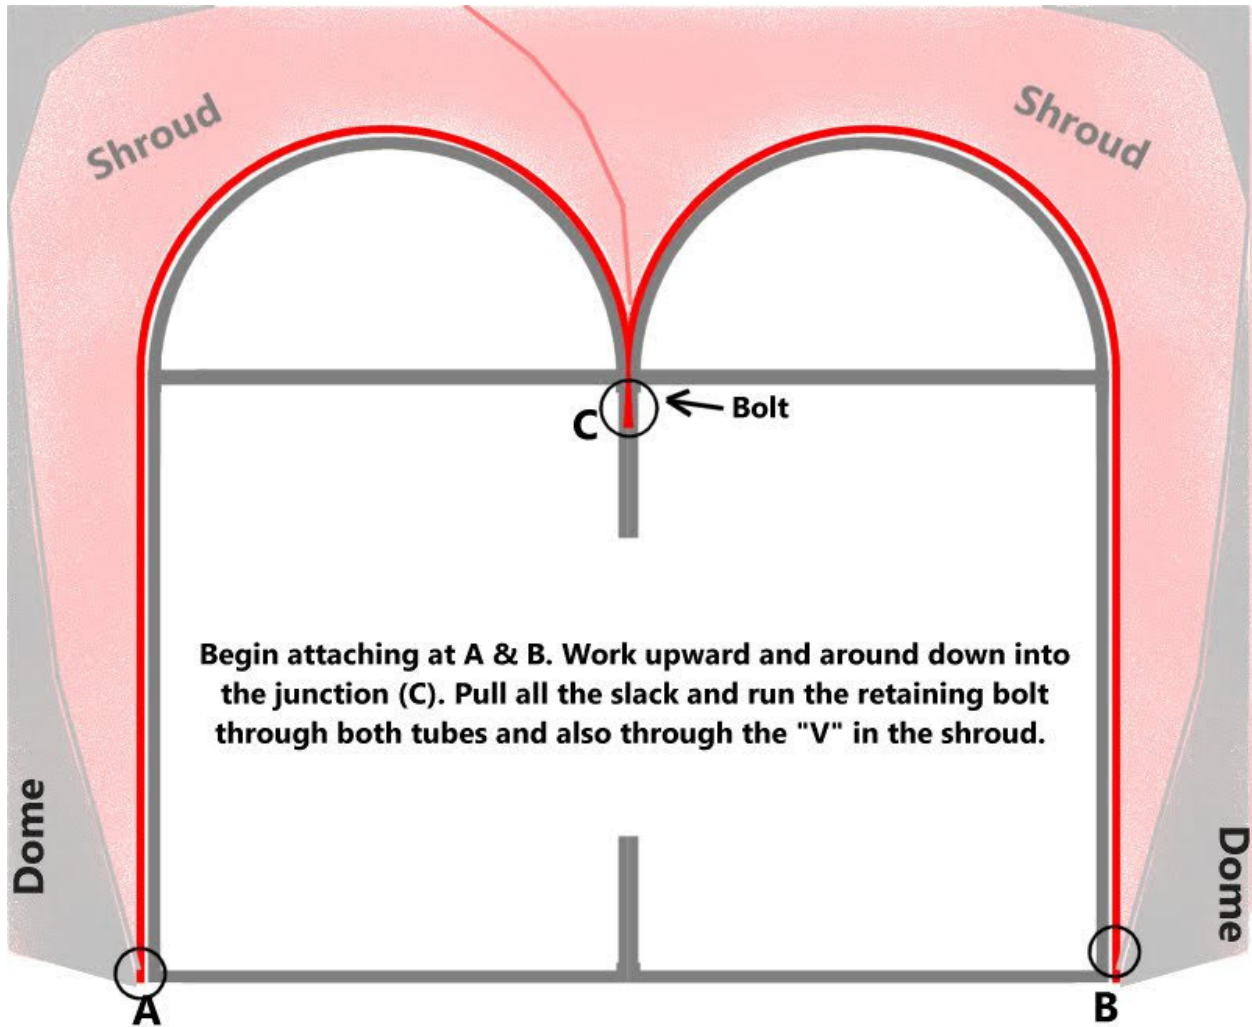

ALCD

ALCD to Shroud 4-13-2021

**Attaching the shroud to an
Air-Lock Crash Door Combo**

Ameri-Brand Products Inc

4619 Olive Hwy.
Oroville, CA. 95966
800-982-6966

www.ameri-brand.com • info@go-ab.com

DomeALCD-196 rev-6-28-2022 TJM